


| | |
|------------------------|--|
| DRAWING NUMBER: | 1127-39-XXXX |
| PRODUCT GROUP: | TERMINALS |
| SUB-GROUP: | COMMERCIAL INSULATED TERMINALS |
| DESCRIPTION: | DIALLYL PHTHALATE INSULATED DOUBLE TURRET TERMINAL |

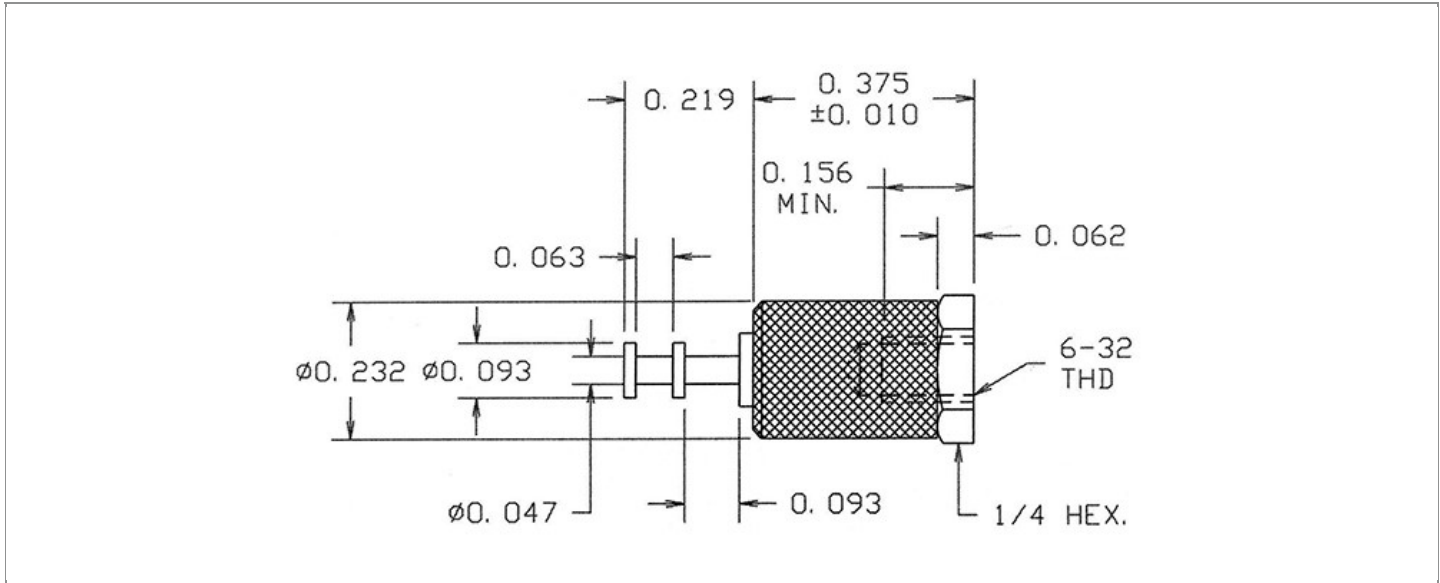

| OVERALL LENGTH | PIN DIAMETER | FEED THRU COMBINATION | BOARD / PANEL MOUNTING METHOD |
|----------------|--------------|-----------------------|-------------------------------|
| 0.594" | N/A | N/A | THREAD MOUNT (6-32 SCREW) |

| SHANK LENGTH (L) | BOARD / PANEL THICKNESS | MOUNTING HOLE SIZE | DRILL SIZE |
|------------------|-------------------------|------------------------|------------|
| N/A | N/A | CLEARANCE FOR #6 SCREW | #27 |

PART NO. STRUCTURE:

| | | | | | |
|-------------|---|-----------|---|--------|------------------|
| 1127 | - | 39 | - | XX | XX |
| PART SERIES | | DIMENSION | | FINISH | INSULATION COLOR |

MATERIAL OPTIONS:

1127-39-XXXX

| COMPONENT | MATERIAL | MATERIAL AND SPECIFICATION |
|-------------------|-------------------|---|
| TERMINAL | BRASS | BRASS PER ASTM B16, ALLOY C36000, 1/2 HARD |
| BASE/METAL SLEEVE | BRASS | BRASS PER ASTM B16, ALLOY C36000, 1/2 HARD |
| INSULATION* | DIALLYL PHTHALATE | MOLDED DIALLYL PHTHALATE, TYPE SDG-F PER ASTM D5948 |
| NUT | N/A | N/A |
| WASHER | N/A | N/A |

*For Insulation color, please see INSULATION COLOR OPTIONS on Page 3

FINISH - PLATING OPTIONS:

1127-39-XXXX

| FINISH CODE | COMPONENT | FINISH | FINISH AND SPECIFICATION |
|-------------|-------------------|--------------------|---|
| 01 | TERMINAL | SILVER | 0.000300"MIN. SILVER PER ASTM B700, TYPE 2, GRADE D WITH A NON-CHROMATE PRESERVATIVE TREATMENT |
| | BASE/METAL SLEEVE | ZINC | 0.000100"MIN. ZINC WITH YELLOW TRIVALENT CHROMATE PER ASTM B633 |
| | NUT | N/A | N/A |
| | WASHER | N/A | N/A |
| 03 | TERMINAL | GOLD | 0.000010"MIN. GOLD PER ASTM B488, TYPE II, CODE C OVER 0.000100"MIN. NICKEL PER SAE-AMS-QQ-N-290 |
| | BASE/METAL SLEEVE | ZINC | 0.000100"MIN. ZINC WITH YELLOW TRIVALENT CHROMATE PER ASTM B633 |
| | NUT | N/A | N/A |
| | WASHER | N/A | N/A |
| 04 | TERMINAL | ELECTRO-TIN | 0.000300"MIN. ELECTRO-TIN PER ASTM B545 OVER 0.000100"MIN. NICKEL PER SAE-AMS-QQ-N-290 |
| | BASE/METAL SLEEVE | ZINC | 0.000100"MIN. ZINC WITH YELLOW TRIVALENT CHROMATE PER ASTM B633 |
| | NUT | N/A | N/A |
| | WASHER | N/A | N/A |
| 044 | TERMINAL | BRIGHT ELECTRO-TIN | 0.000300"MIN. BRIGHT ELECTRO-TIN PER ASTM B545 OVER 0.000100"MIN. NICKEL PER SAE-AMS-QQ-N-290 |
| | BASE/METAL SLEEVE | ZINC | 0.000100"MIN. ZINC WITH YELLOW TRIVALENT CHROMATE PER ASTM B633 |
| | NUT | N/A | N/A |
| | WASHER | N/A | N/A |
| 05 | TERMINAL | ELECTRO-SOLDER | 0.000300"MIN. ELECTRO-SOLDER PER SAE-AMS-P-81728 OVER 0.000100"MIN. NICKEL PER SAE-AMS-QQ-N-290 |
| | BASE/METAL SLEEVE | ZINC | 0.000100"MIN. ZINC WITH YELLOW TRIVALENT CHROMATE PER ASTM B633 |
| | NUT | N/A | N/A |
| | WASHER | N/A | N/A |
| 088 | TERMINAL | BRIGHT TIN-LEAD | 0.000300"MIN. BRIGHT TIN-LEAD (Sn93%-Pb7%) PER ASTM B545 OVER 0.000100"MIN. NICKEL PER SAE-AMS-QQ-N-290 |
| | BASE/METAL SLEEVE | ZINC | 0.000100"MIN. ZINC WITH YELLOW TRIVALENT CHROMATE PER ASTM B633 |
| | NUT | N/A | N/A |
| | WASHER | N/A | N/A |

INSULATION COLOR OPTIONS:

1127-39-XX **XX**

| INSULATION COLOR | BLACK | BLUE | BROWN | GRAY | GREEN | ORANGE | RED | VIOLET | WHITE | YELLOW |
|------------------|-------|------|-------|------|-------|--------|-----|--------|-------|--------|
| COLOR CODE NO. | 10 | 16 | 11 | 18 | 15 | 13 | 12 | 17 | 19 | 14 |

TOLERANCES:*

| DECIMAL | FRACTIONAL | ANGULAR | DRAWING ORIGATION DATE | LAST MODIFICATION DATE |
|---------|------------|---------|------------------------|------------------------|
| ± 0.005 | ± 1/64 | ± 5 ° | 9/12/1996 | 3/1/2017 |

*All dimensions are in inches.

RoHS COMPLIANCE:

1127-39-01XX

| PART NUMBER | RoHS COMPLIANT |
|--------------|----------------|
| 1127-39-0110 | YES |
| 1127-39-0111 | YES |
| 1127-39-0112 | YES |
| 1127-39-0113 | YES |
| 1127-39-0114 | YES |
| 1127-39-0115 | YES |
| 1127-39-0116 | YES |
| 1127-39-0117 | YES |
| 1127-39-0118 | YES |
| 1127-39-0119 | YES |

1127-39-03XX

| PART NUMBER | RoHS COMPLIANT |
|--------------|----------------|
| 1127-39-0310 | YES |
| 1127-39-0311 | YES |
| 1127-39-0312 | YES |
| 1127-39-0313 | YES |
| 1127-39-0314 | YES |
| 1127-39-0315 | YES |
| 1127-39-0316 | YES |
| 1127-39-0317 | YES |
| 1127-39-0318 | YES |
| 1127-39-0319 | YES |

1127-39-04XX

| PART NUMBER | RoHS COMPLIANT |
|--------------|----------------|
| 1127-39-0410 | YES |
| 1127-39-0411 | YES |
| 1127-39-0412 | YES |
| 1127-39-0413 | YES |
| 1127-39-0414 | YES |
| 1127-39-0415 | YES |
| 1127-39-0416 | YES |
| 1127-39-0417 | YES |
| 1127-39-0418 | YES |
| 1127-39-0419 | YES |

1127-39-044XX

| PART NUMBER | RoHS COMPLIANT |
|---------------|----------------|
| 1127-39-04410 | YES |
| 1127-39-04411 | YES |
| 1127-39-04412 | YES |
| 1127-39-04413 | YES |
| 1127-39-04414 | YES |
| 1127-39-04415 | YES |
| 1127-39-04416 | YES |
| 1127-39-04417 | YES |
| 1127-39-04418 | YES |
| 1127-39-04419 | YES |

1127-39-05XX

| PART NUMBER | RoHS COMPLIANT |
|--------------|----------------|
| 1127-39-0510 | NO |
| 1127-39-0511 | NO |
| 1127-39-0512 | NO |
| 1127-39-0513 | NO |
| 1127-39-0514 | NO |
| 1127-39-0515 | NO |
| 1127-39-0516 | NO |
| 1127-39-0517 | NO |
| 1127-39-0518 | NO |
| 1127-39-0519 | NO |

1127-39-088XX

| PART NUMBER | RoHS COMPLIANT |
|---------------|----------------|
| 1127-39-08810 | NO |
| 1127-39-08811 | NO |
| 1127-39-08812 | NO |
| 1127-39-08813 | NO |
| 1127-39-08814 | NO |
| 1127-39-08815 | NO |
| 1127-39-08816 | NO |
| 1127-39-08817 | NO |
| 1127-39-08818 | NO |
| 1127-39-08819 | NO |

TOOLING:

| INSTALLATION TOOL: ARBOR PRESS | INSTALLATION TOOL: ANVIL (ARBOR PRESS OPERATED) | INSTALLATION TOOL: PRESS-FIT / ROLL SWAGE / RIVET PUNCH (ARBOR PRESS OPERATED) | INSTALLATION TOOL: PRESS-FIT (HAND OPERATED) |
|-----------------------------------|---|--|--|
| N/A | N/A | N/A | N/A |

NOTES:

DATASHEET NOTES

SCREW IS NOT INCLUDED.

INSTRUCTION NOTES

N/A