


|                        |   |
|------------------------|---|
| <b>DRAWING NUMBER:</b> | <b>09-0258-X-XX</b>                       |
| <b>PRODUCT GROUP:</b>  | TERMINALS                                 |
| <b>SUB-GROUP:</b>      | COMMERCIAL NON-INSULATED TERMINALS        |
| <b>DESCRIPTION:</b>    | NON-INSULATED RIGHT ANGLE PC PIN TERMINAL |

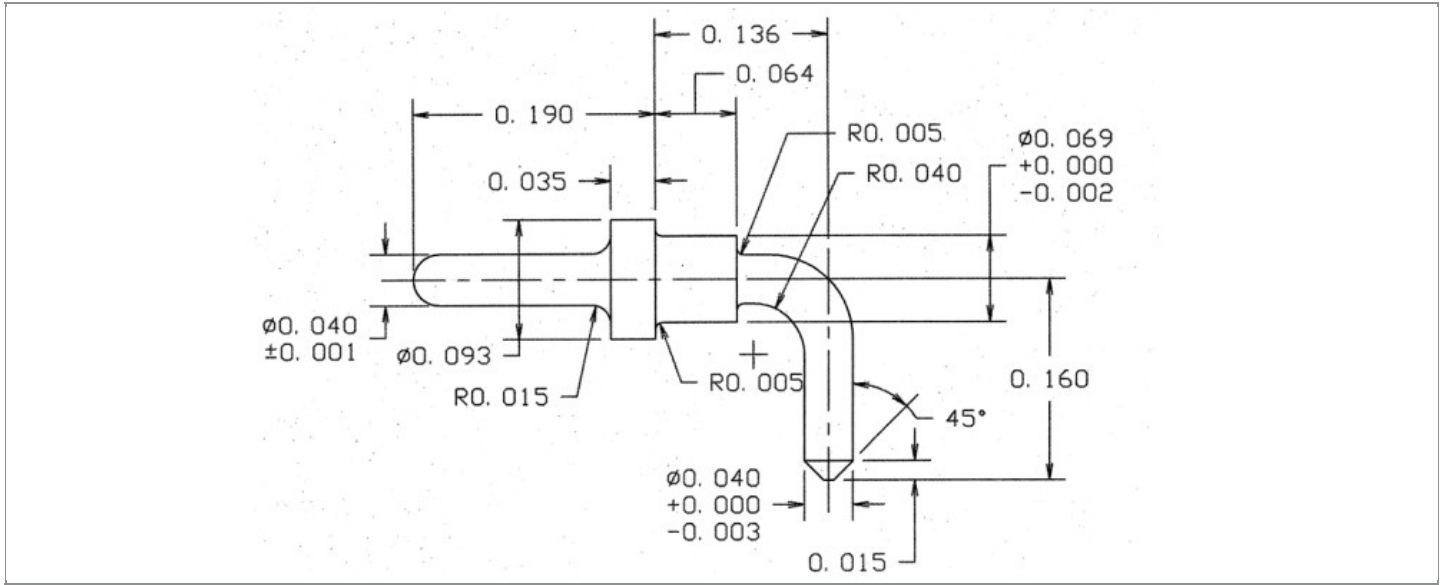

| BOARD / PANEL MOUNTING METHOD | MOUNTING HOLE SIZE | DRILL SIZE | FEED THRU COMBINATION |
|-------------------------------|--------------------|------------|-----------------------|
| SOLDER                        | 0.070" ± 0.001     | #50        | PIN/PIN               |

**PART NO. STRUCTURE:**

09-0258 - 1 - XX  
 PART SERIES    DIMENSION    FINISH

**MATERIAL OPTIONS:**

09-0258-1-XX

| COMPONENT | MATERIAL | MATERIAL AND SPECIFICATION                 |
|-----------|----------|--|
| TERMINAL  | BRASS    | BRASS PER ASTM B16, ALLOY C36000, 1/2 HARD |

**DIMENSION OPTIONS:**

09-0258-1-XX

| DIMENSION | A   | D   | PIN DIAMETER                                    | OVERALL LENGTH  | SHANK LENGTH (L) | BOARD/PANEL THICKNESS |
|-----------|-----|-----|---|-----------------|------------------|-----------------------|
| 1         | N/A | N/A | (0.040"<br>(+0.000/-0.003))/(0.040" ±<br>0.001) | 0.346" x 0.207" | 0.064"           | 1/32"                 |

FINISH - PLATING OPTIONS:

09-0258-1-XX

| FINISH CODE | COMPONENT | FINISH             | FINISH AND SPECIFICATION   |
|-------------|-----------|--------------------|--|
| 01          | TERMINAL  | SILVER             | 0.000300"MIN. SILVER PER ASTM B700, TYPE 2, GRADE D WITH A NON-CHROMATE PRESERVATIVE TREATMENT       |
| 03          | TERMINAL  | GOLD               | 0.000010"MIN. GOLD PER ASTM B488, TYPE II, CODE C OVER 0.000050"MIN. NICKEL PER SAE-AMS-QQ-N-290     |
| 035         | TERMINAL  | GOLD               | 0.000050"MIN. GOLD PER ASTM B488, TYPE II, CODE C OVER 0.000050"MIN. NICKEL PER SAE-AMS-QQ-N-290     |
| 04          | TERMINAL  | ELECTRO-TIN        | 0.000300"MIN. ELECTRO-TIN PER ASTM B545 OVER 0.000100"MIN. COPPER PER SAE-AMS-2418                   |
| 044         | TERMINAL  | BRIGHT ELECTRO-TIN | 0.000300"MIN. BRIGHT ELECTRO-TIN PER ASTM B545 OVER 0.000100"MIN. COPPER PER SAE-AMS-2418            |
| 05          | TERMINAL  | ELECTRO-SOLDER     | 0.000300"MIN. ELECTRO-SOLDER PER SAE-AMS-P-81728 OVER 0.000100"MIN. COPPER PER SAE-AMS-2418          |
| 088         | TERMINAL  | BRIGHT TIN-LEAD    | 0.000300"MIN. BRIGHT TIN-LEAD (Sn93%-Pb7%) PER ASTM B545 OVER 0.000100"MIN. COPPER PER SAE-AMS-2418  |
| 095         | TERMINAL  | HOT SOLDER DIP     | 0.000100"MIN. HOT SOLDER DIP USING Sn60 PER IPC-J-STD-006 OVER 0.000100"MIN. COPPER PER SAE-AMS-2418 |

TOLERANCES:\*

| DECIMAL | FRACTIONAL | ANGULAR | DRAWING ORIGATION DATE | LAST MODIFICATION DATE |
|---------|------------|---------|------------------------|------------------------|
| ± 0.005 | ± 1/64     | ± 5 °   | 5/29/2002              | 3/1/2017               |

\*All dimensions are in inches.

RoHS COMPLIANCE:

09-0258-1-XX

| PART NUMBER   | RoHS COMPLIANT |
|---------------|----------------|
| 09-0258-1-01  | YES            |
| 09-0258-1-03  | YES            |
| 09-0258-1-035 | YES            |
| 09-0258-1-04  | YES            |
| 09-0258-1-044 | YES            |
| 09-0258-1-05  | NO             |
| 09-0258-1-088 | NO             |
| 09-0258-1-095 | NO             |

TOOLING:

| INSTALLATION TOOL:<br>ARBOR PRESS | INSTALLATION TOOL:<br>ANVIL<br>(ARBOR PRESS OPERATED) | INSTALLATION TOOL:<br>PRESS-FIT / ROLL SWAGE / RIVET PUNCH<br>(ARBOR PRESS OPERATED) | INSTALLATION TOOL:<br>FLARE SWAGE PUNCH<br>(ARBOR PRESS OPERATED) |
|-----------------------------------|---|--|---|
| N/A                               | N/A   | N/A  | N/A   |

NOTES:

**DATASHEET NOTES**

N/A

**INSTRUCTION NOTES**

N/A