


<b>DRAWING NUMBER:</b>	<b>10-108-X-XX</b>
<b>PRODUCT GROUP:</b>	TERMINALS
<b>SUB-GROUP:</b>	COMMERCIAL NON-INSULATED TERMINALS
<b>DESCRIPTION:</b>	NON-INSULATED TURRET TERMINAL

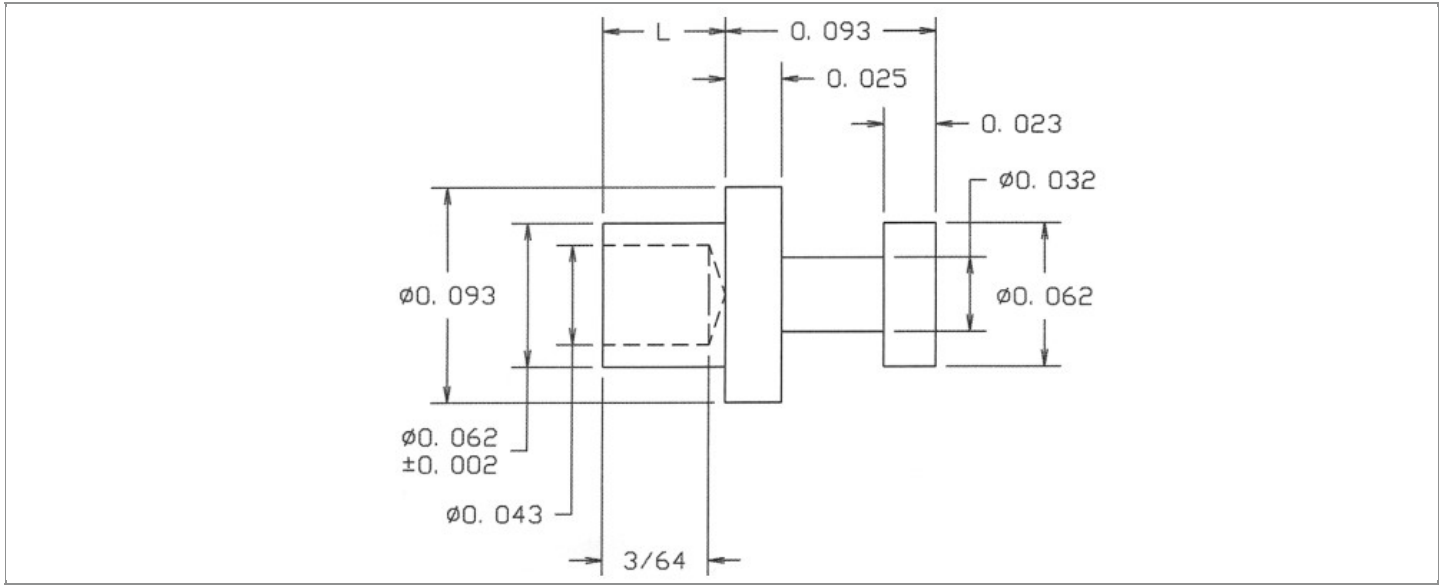

BOARD / PANEL MOUNTING METHOD	MOUNTING HOLE SIZE	DRILL SIZE	FEED THRU COMBINATION
SWAGE MOUNT	0.067" ± 0.001	#51	N/A

**PART NO. STRUCTURE:**

10-108 - X - XX  
 PART SERIES    DIMENSION    FINISH

**MATERIAL OPTIONS:**

10-108-X-XX

COMPONENT	MATERIAL	MATERIAL AND SPECIFICATION
TERMINAL	BRASS	BRASS PER ASTM B16, ALLOY C36000, 1/2 HARD

**DIMENSION OPTIONS:**

10-108-X-XX

DIMENSION	A	D	PIN DIAMETER	OVERALL LENGTH	SHANK LENGTH (L)	BOARD/PANEL THICKNESS
1	N/A	N/A	N/A	0.147"	0.054"	1/32"
2	N/A	N/A	N/A	0.177"	0.084"	1/16"
3	N/A	N/A	N/A	0.208"	0.115"	3/32"
4	N/A	N/A	N/A	0.240"	0.147"	1/8"
11	N/A	N/A	N/A	0.130"	0.037"	1/64"

FINISH - PLATING OPTIONS:

10-108-X-**XX**

FINISH CODE	COMPONENT	FINISH	FINISH AND SPECIFICATION
01	TERMINAL	SILVER	0.000300"MIN. SILVER PER ASTM B700, TYPE 2, GRADE D WITH A NON-CHROMATE PRESERVATIVE TREATMENT
03	TERMINAL	GOLD	0.000010"MIN. GOLD PER ASTM B488, TYPE II, CODE C OVER 0.000050"MIN. NICKEL PER SAE-AMS-QQ-N-290
035	TERMINAL	GOLD	0.000050"MIN. GOLD PER ASTM B488, TYPE II, CODE C OVER 0.000050"MIN. NICKEL PER SAE-AMS-QQ-N-290
04	TERMINAL	ELECTRO-TIN	0.000300"MIN. ELECTRO-TIN PER ASTM B545 OVER 0.000100"MIN. COPPER PER SAE-AMS-2418
044	TERMINAL	BRIGHT ELECTRO-TIN	0.000300"MIN. BRIGHT ELECTRO-TIN PER ASTM B545 OVER 0.000100"MIN. COPPER PER SAE-AMS-2418
05	TERMINAL	ELECTRO-SOLDER	0.000300"MIN. ELECTRO-SOLDER PER SAE-AMS-P-81728 OVER 0.000100"MIN. COPPER PER SAE-AMS-2418
088	TERMINAL	BRIGHT TIN-LEAD	0.000300"MIN. BRIGHT TIN-LEAD (Sn93%-Pb7%) PER ASTM B545 OVER 0.000100"MIN. COPPER PER SAE-AMS-2418
095	TERMINAL	HOT SOLDER DIP	0.000100"MIN. HOT SOLDER DIP USING Sn60 PER IPC-J-STD-006 OVER 0.000100"MIN. COPPER PER SAE-AMS-2418

TOLERANCES:\*

DECIMAL	FRACTIONAL	ANGULAR	DRAWING ORIGATION DATE	LAST MODIFICATION DATE
± 0.005	± 1/64	± 5 °	8/31/2000	3/1/2017

\*All dimensions are in inches.

RoHS COMPLIANCE:

10-108-1-XX

PART NUMBER	RoHS COMPLIANT
10-108-1-01	YES
10-108-1-03	YES
10-108-1-035	YES
10-108-1-04	YES
10-108-1-044	YES
10-108-1-05	NO
10-108-1-088	NO
10-108-1-095	NO

10-108-2-XX

PART NUMBER	RoHS COMPLIANT
10-108-2-01	YES
10-108-2-03	YES
10-108-2-035	YES
10-108-2-04	YES
10-108-2-044	YES
10-108-2-05	NO
10-108-2-088	NO
10-108-2-095	NO

10-108-3-XX

PART NUMBER	RoHS COMPLIANT
10-108-3-01	YES
10-108-3-03	YES
10-108-3-035	YES
10-108-3-04	YES
10-108-3-044	YES
10-108-3-05	NO
10-108-3-088	NO
10-108-3-095	NO

Continued on next page...

RoHS COMPLIANCE CONTINUED:

10-108-4-XX

PART NUMBER	RoHS COMPLIANT
10-108-4-01	YES
10-108-4-03	YES
10-108-4-035	YES
10-108-4-04	YES
10-108-4-044	YES
10-108-4-05	NO
10-108-4-088	NO
10-108-4-095	NO

10-108-11-XX

PART NUMBER	RoHS COMPLIANT
10-108-11-01	YES
10-108-11-03	YES
10-108-11-035	YES
10-108-11-04	YES
10-108-11-044	YES
10-108-11-05	NO
10-108-11-088	NO
10-108-11-095	NO

TOOLING:

INSTALLATION TOOL: ARBOR PRESS	INSTALLATION TOOL: ANVIL (ARBOR PRESS OPERATED)	INSTALLATION TOOL: PRESS-FIT / ROLL SWAGE / RIVET PUNCH (ARBOR PRESS OPERATED)	INSTALLATION TOOL: FLARE SWAGE PUNCH (ARBOR PRESS OPERATED)
TM1	TA94-62-20	TP62-44	TFLP90-150

NOTES:

DATASHEET NOTES
N/A

INSTRUCTION NOTES
SEE GENERAL SWAGING INSTALLATION INSTRUCTION ON CONCORD ELECTRONICS' WEBSITE <a href="http://WWW.CONCORD-ELECTRONICS.COM">WWW.CONCORD-ELECTRONICS.COM</a> .