


<b>DRAWING NUMBER:</b>	<b>10-304-X-XX</b>
<b>PRODUCT GROUP:</b>	TERMINALS
<b>SUB-GROUP:</b>	COMMERCIAL NON-INSULATED TERMINALS
<b>DESCRIPTION:</b>	NON-INSULATED THRU-HOLE DOUBLE TURRET TERMINAL

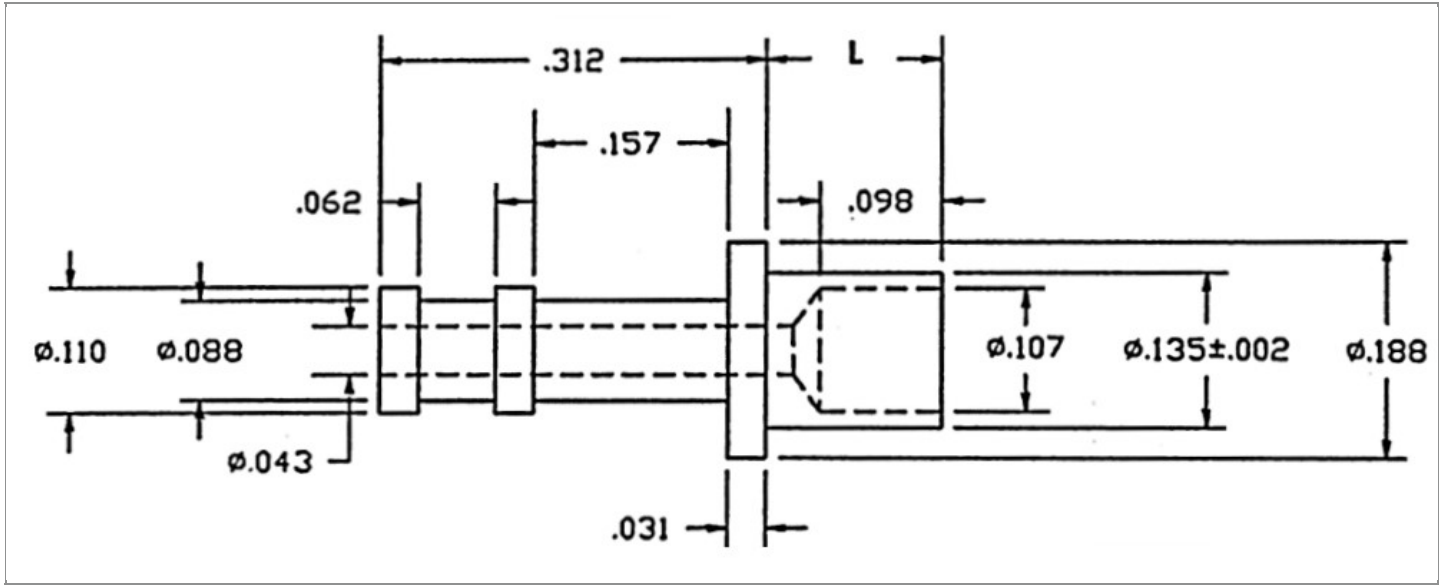

BOARD / PANEL MOUNTING METHOD	MOUNTING HOLE SIZE	DRILL SIZE	FEED THRU COMBINATION
SWAGE MOUNT	0.1405" ± 0.001	#28	N/A

**PART NO. STRUCTURE:**

10-304	-	X	-	XX
PART SERIES		DIMENSION		FINISH

**MATERIAL OPTIONS:**

10-304-X-XX

COMPONENT	MATERIAL	MATERIAL AND SPECIFICATION
TERMINAL	BRASS	BRASS PER ASTM B16, ALLOY C36000, 1/2 HARD

**DIMENSION OPTIONS:**

10-304-X-XX

DIMENSION	A	D	PIN DIAMETER	OVERALL LENGTH	SHANK LENGTH (L)	BOARD/PANEL THICKNESS
2	N/A	N/A	N/A	0.421"	0.109"	1/16"
3	N/A	N/A	N/A	0.453"	0.141"	3/32"
4	N/A	N/A	N/A	0.484"	0.172"	1/8"
6	N/A	N/A	N/A	0.546"	0.234"	3/16"

FINISH - PLATING OPTIONS:

10-304-X-XX

FINISH CODE	COMPONENT	FINISH	FINISH AND SPECIFICATION
01	TERMINAL	SILVER	0.000300"MIN. SILVER PER ASTM B700, TYPE 2, GRADE D WITH A NON-CHROMATE PRESERVATIVE TREATMENT
03	TERMINAL	GOLD	0.000010"MIN. GOLD PER ASTM B488, TYPE II, CODE C OVER 0.000050"MIN. NICKEL PER SAE-AMS-QQ-N-290
035	TERMINAL	GOLD	0.000050"MIN. GOLD PER ASTM B488, TYPE II, CODE C OVER 0.000050"MIN. NICKEL PER SAE-AMS-QQ-N-290
04	TERMINAL	ELECTRO-TIN	0.000300"MIN. ELECTRO-TIN PER ASTM B545 OVER 0.000100"MIN. COPPER PER SAE-AMS-2418
044	TERMINAL	BRIGHT ELECTRO-TIN	0.000300"MIN. BRIGHT ELECTRO-TIN PER ASTM B545 OVER 0.000100"MIN. COPPER PER SAE-AMS-2418
05	TERMINAL	ELECTRO-SOLDER	0.000300"MIN. ELECTRO-SOLDER PER SAE-AMS-P-81728 OVER 0.000100"MIN. COPPER PER SAE-AMS-2418
088	TERMINAL	BRIGHT TIN-LEAD	0.000300"MIN. BRIGHT TIN-LEAD (Sn93%-Pb7%) PER ASTM B545 OVER 0.000100"MIN. COPPER PER SAE-AMS-2418
095	TERMINAL	HOT SOLDER DIP	0.000100"MIN. HOT SOLDER DIP USING Sn60 PER IPC-J-STD-006 OVER 0.000100"MIN. COPPER PER SAE-AMS-2418

TOLERANCES:\*

DECIMAL	FRACTIONAL	ANGULAR	DRAWING ORIGATION DATE	LAST MODIFICATION DATE
± 0.005	± 1/64	± 5 °	3/4/1996	3/1/2017

\*All dimensions are in inches.

RoHS COMPLIANCE:

10-304-2-XX

PART NUMBER	RoHS COMPLIANT
10-304-2-01	YES
10-304-2-03	YES
10-304-2-035	YES
10-304-2-04	YES
10-304-2-044	YES
10-304-2-05	NO
10-304-2-088	NO
10-304-2-095	NO

10-304-3-XX

PART NUMBER	RoHS COMPLIANT
10-304-3-01	YES
10-304-3-03	YES
10-304-3-035	YES
10-304-3-04	YES
10-304-3-044	YES
10-304-3-05	NO
10-304-3-088	NO
10-304-3-095	NO

10-304-4-XX

PART NUMBER	RoHS COMPLIANT
10-304-4-01	YES
10-304-4-03	YES
10-304-4-035	YES
10-304-4-04	YES
10-304-4-044	YES
10-304-4-05	NO
10-304-4-088	NO
10-304-4-095	NO

Continued on next page...

RoHS COMPLIANCE CONTINUED:

10-304-6-XX

PART NUMBER	RoHS COMPLIANT
10-304-6-01	YES
10-304-6-03	YES
10-304-6-035	YES
10-304-6-04	YES
10-304-6-044	YES
10-304-6-05	NO
10-304-6-088	NO
10-304-6-095	NO

TOOLING:

INSTALLATION TOOL: ARBOR PRESS	INSTALLATION TOOL: ANVIL (ARBOR PRESS OPERATED)	INSTALLATION TOOL: PRESS-FIT / ROLL SWAGE / RIVET PUNCH (ARBOR PRESS OPERATED)	INSTALLATION TOOL: FLARE SWAGE PUNCH (ARBOR PRESS OPERATED)
TM1	TA188-110-31	TP136-110	TFLP90-225

NOTES:

DATASHEET NOTES
-----------------

N/A

INSTRUCTION NOTES
-------------------

SEE GENERAL SWAGING INSTALLATION INSTRUCTION ON CONCORD ELECTRONICS' WEBSITE [WWW.CONCORD-ELECTRONICS.COM](http://WWW.CONCORD-ELECTRONICS.COM).