


|                        |                                       |
|------------------------|---------------------------------------|
| <b>DRAWING NUMBER:</b> | 1125-04-XXXX                          |
| <b>PRODUCT GROUP:</b>  | TERMINALS                             |
| <b>SUB-GROUP:</b>      | COMMERCIAL INSULATED TERMINALS        |
| <b>DESCRIPTION:</b>    | PTFE INSULATED DOUBLE TURRET TERMINAL |

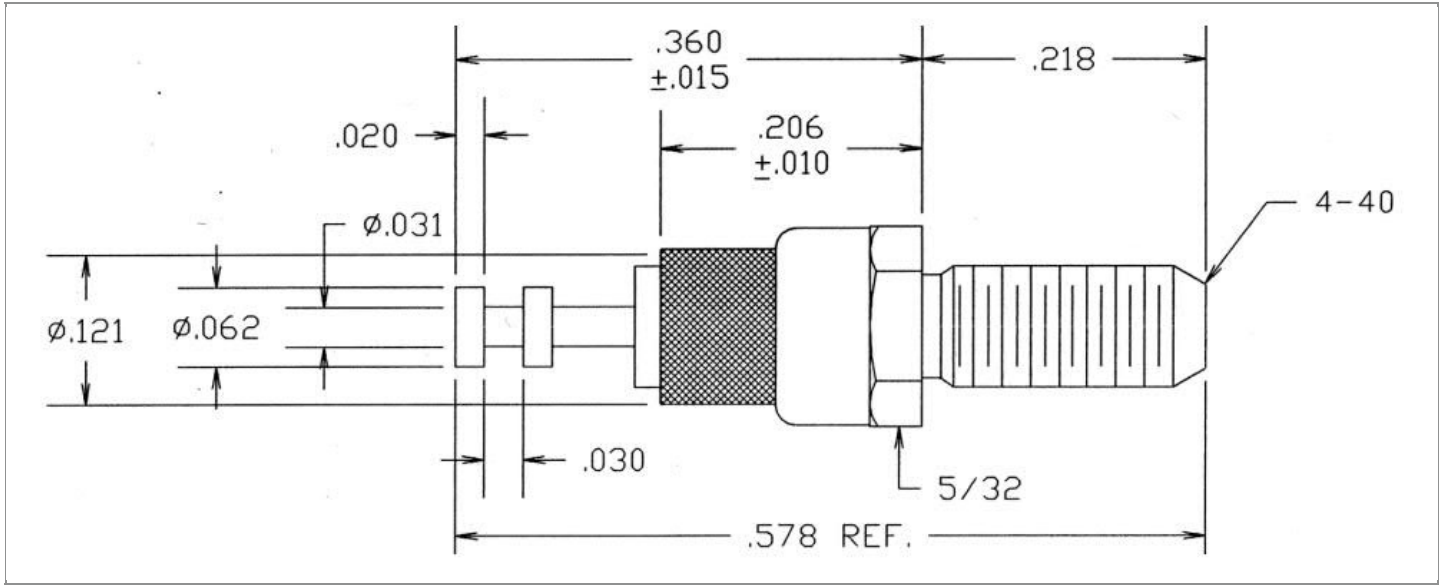

| OVERALL LENGTH   | PIN DIAMETER            | FEED THRU COMBINATION | BOARD / PANEL MOUNTING METHOD |
|------------------|-------------------------|-----------------------|-------------------------------|
| 0.578" REF.      | N/A                     | N/A                   | THREAD MOUNT (4-40 NUT)       |
| SHANK LENGTH (L) | BOARD / PANEL THICKNESS | MOUNTING HOLE SIZE    | DRILL SIZE                    |
| N/A              | UP TO 7/64"             | 0.120" ± 0.002        | #31                           |

**PART NO. STRUCTURE:**

|             |   |           |   |        |                  |
|-------------|---|-----------|---|--------|------------------|
| 1125        | - | 04        | - | XX     | XX               |
| PART SERIES |   | DIMENSION |   | FINISH | INSULATION COLOR |

**MATERIAL OPTIONS:**

**1125-04-XXXX**

| COMPONENT         | MATERIAL | MATERIAL AND SPECIFICATION                 |
|-------------------|----------|--|
| TERMINAL          | BRASS    | BRASS PER ASTM B16, ALLOY C36000, 1/2 HARD |
| BASE/METAL SLEEVE | BRASS    | BRASS PER ASTM B16, ALLOY C36000, 1/2 HARD |
| INSULATION*       | PTFE     | PTFE PER ASTM D1710                        |
| NUT               | N/A      | N/A  |
| WASHER            | N/A      | N/A  |

\*For Insulation color, please see INSULATION COLOR OPTIONS on Page 3

## FINISH - PLATING OPTIONS:

1125-04-XXXX

| FINISH CODE | COMPONENT         | FINISH             | FINISH AND SPECIFICATION  |
|-------------|-------------------|--------------------|---|
| 01          | TERMINAL          | SILVER             | 0.000300"MIN. SILVER PER ASTM B700, TYPE 2, GRADE D WITH A NON-CHROMATE PRESERVATIVE TREATMENT          |
|             | BASE/METAL SLEEVE | ELECTRO-TIN        | 0.000100"MIN. ELECTRO-TIN PER ASTM B545 OVER 0.000050"MIN. NICKEL PER SAE-AMS-QQ-N-290                  |
|             | NUT               | N/A                | N/A   |
|             | WASHER            | N/A                | N/A   |
| 03          | TERMINAL          | GOLD               | 0.000010"MIN. GOLD PER ASTM B488, TYPE II, CODE C OVER 0.000100"MIN. NICKEL PER SAE-AMS-QQ-N-290        |
|             | BASE/METAL SLEEVE | ELECTRO-TIN        | 0.000100"MIN. ELECTRO-TIN PER ASTM B545 OVER 0.000050"MIN. NICKEL PER SAE-AMS-QQ-N-290                  |
|             | NUT               | N/A                | N/A   |
|             | WASHER            | N/A                | N/A   |
| 04          | TERMINAL          | ELECTRO-TIN        | 0.000300"MIN. ELECTRO-TIN PER ASTM B545 OVER 0.000100"MIN. NICKEL PER SAE-AMS-QQ-N-290                  |
|             | BASE/METAL SLEEVE | ELECTRO-TIN        | 0.000100"MIN. ELECTRO-TIN PER ASTM B545 OVER 0.000050"MIN. NICKEL PER SAE-AMS-QQ-N-290                  |
|             | NUT               | N/A                | N/A   |
|             | WASHER            | N/A                | N/A   |
| 044         | TERMINAL          | BRIGHT ELECTRO-TIN | 0.000300"MIN. BRIGHT ELECTRO-TIN PER ASTM B545 OVER 0.000100"MIN. NICKEL PER SAE-AMS-QQ-N-290           |
|             | BASE/METAL SLEEVE | ELECTRO-TIN        | 0.000100"MIN. ELECTRO-TIN PER ASTM B545 OVER 0.000050"MIN. NICKEL PER SAE-AMS-QQ-N-290                  |
|             | NUT               | N/A                | N/A   |
|             | WASHER            | N/A                | N/A   |
| 05          | TERMINAL          | ELECTRO-SOLDER     | 0.000300"MIN. ELECTRO-SOLDER PER SAE-AMS-P-81728 OVER 0.000100"MIN. NICKEL PER SAE-AMS-QQ-N-290         |
|             | BASE/METAL SLEEVE | ELECTRO-TIN        | 0.000100"MIN. ELECTRO-TIN PER ASTM B545 OVER 0.000050"MIN. NICKEL PER SAE-AMS-QQ-N-290                  |
|             | NUT               | N/A                | N/A   |
|             | WASHER            | N/A                | N/A   |
| 088         | TERMINAL          | BRIGHT TIN-LEAD    | 0.000300"MIN. BRIGHT TIN-LEAD (Sn93%-Pb7%) PER ASTM B545 OVER 0.000100"MIN. NICKEL PER SAE-AMS-QQ-N-290 |
|             | BASE/METAL SLEEVE | ELECTRO-TIN        | 0.000100"MIN. ELECTRO-TIN PER ASTM B545 OVER 0.000050"MIN. NICKEL PER SAE-AMS-QQ-N-290                  |
|             | NUT               | N/A                | N/A   |
|             | WASHER            | N/A                | N/A   |

INSULATION COLOR OPTIONS:

1125-04-XX **XX**

| INSULATION COLOR | BLACK | BLUE | BROWN | GRAY | GREEN | ORANGE | RED | VIOLET | WHITE | YELLOW |
|------------------|-------|------|-------|------|-------|--------|-----|--------|-------|--------|
| COLOR CODE NO.   | 10    | 16   | 11    | 18   | 15    | 13     | 12  | 17     | 19    | 14     |

TOLERANCES:\*

| DECIMAL | FRACTIONAL | ANGULAR | DRAWING ORIGATION DATE | LAST MODIFICATION DATE |
|---------|------------|---------|------------------------|------------------------|
| ± 0.005 | ± 1/64     | ± 5 °   | 5/13/1996              | 3/1/2017               |

\*All dimensions are in inches.

RoHS COMPLIANCE:

1125-04-01XX

| PART NUMBER  | RoHS COMPLIANT |
|--------------|----------------|
| 1125-04-0110 | YES            |
| 1125-04-0111 | NO             |
| 1125-04-0112 | NO             |
| 1125-04-0113 | NO             |
| 1125-04-0114 | NO             |
| 1125-04-0115 | YES            |
| 1125-04-0116 | YES            |
| 1125-04-0117 | YES            |
| 1125-04-0118 | NO             |
| 1125-04-0119 | YES            |

1125-04-03XX

| PART NUMBER  | RoHS COMPLIANT |
|--------------|----------------|
| 1125-04-0310 | YES            |
| 1125-04-0311 | NO             |
| 1125-04-0312 | NO             |
| 1125-04-0313 | NO             |
| 1125-04-0314 | NO             |
| 1125-04-0315 | YES            |
| 1125-04-0316 | YES            |
| 1125-04-0317 | YES            |
| 1125-04-0318 | NO             |
| 1125-04-0319 | YES            |

1125-04-04XX

| PART NUMBER  | RoHS COMPLIANT |
|--------------|----------------|
| 1125-04-0410 | YES            |
| 1125-04-0411 | NO             |
| 1125-04-0412 | NO             |
| 1125-04-0413 | NO             |
| 1125-04-0414 | NO             |
| 1125-04-0415 | YES            |
| 1125-04-0416 | YES            |
| 1125-04-0417 | YES            |
| 1125-04-0418 | NO             |
| 1125-04-0419 | YES            |

1125-04-044XX

| PART NUMBER   | RoHS COMPLIANT |
|---------------|----------------|
| 1125-04-04410 | YES            |
| 1125-04-04411 | NO             |
| 1125-04-04412 | NO             |
| 1125-04-04413 | NO             |
| 1125-04-04414 | NO             |
| 1125-04-04415 | YES            |
| 1125-04-04416 | YES            |
| 1125-04-04417 | YES            |
| 1125-04-04418 | NO             |
| 1125-04-04419 | YES            |

1125-04-05XX

| PART NUMBER  | RoHS COMPLIANT |
|--------------|----------------|
| 1125-04-0510 | NO             |
| 1125-04-0511 | NO             |
| 1125-04-0512 | NO             |
| 1125-04-0513 | NO             |
| 1125-04-0514 | NO             |
| 1125-04-0515 | NO             |
| 1125-04-0516 | NO             |
| 1125-04-0517 | NO             |
| 1125-04-0518 | NO             |
| 1125-04-0519 | NO             |

1125-04-088XX

| PART NUMBER   | RoHS COMPLIANT |
|---------------|----------------|
| 1125-04-08810 | NO             |
| 1125-04-08811 | NO             |
| 1125-04-08812 | NO             |
| 1125-04-08813 | NO             |
| 1125-04-08814 | NO             |
| 1125-04-08815 | NO             |
| 1125-04-08816 | NO             |
| 1125-04-08817 | NO             |
| 1125-04-08818 | NO             |
| 1125-04-08819 | NO             |

TOOLING:

| INSTALLATION TOOL:<br>ARBOR PRESS | INSTALLATION TOOL:<br>ANVIL<br>(ARBOR PRESS OPERATED) | INSTALLATION TOOL:<br>PRESS-FIT / ROLL SWAGE / RIVET PUNCH<br>(ARBOR PRESS OPERATED) | INSTALLATION TOOL:<br>PRESS-FIT<br>(HAND OPERATED) |
|-----------------------------------|---|--|--|
| N/A                               | N/A   | N/A  | N/A  |

NOTES:

**DATASHEET NOTES**

NUT AND WASHER ARE NOT INCLUDED.

**INSTRUCTION NOTES**

N/A