


DRAWING NUMBER:	1102-85-XXXX
PRODUCT GROUP:	TERMINALS
SUB-GROUP:	COMMERCIAL INSULATED TERMINALS
DESCRIPTION:	PTFE INSULATED DOUBLE TURRET TERMINAL

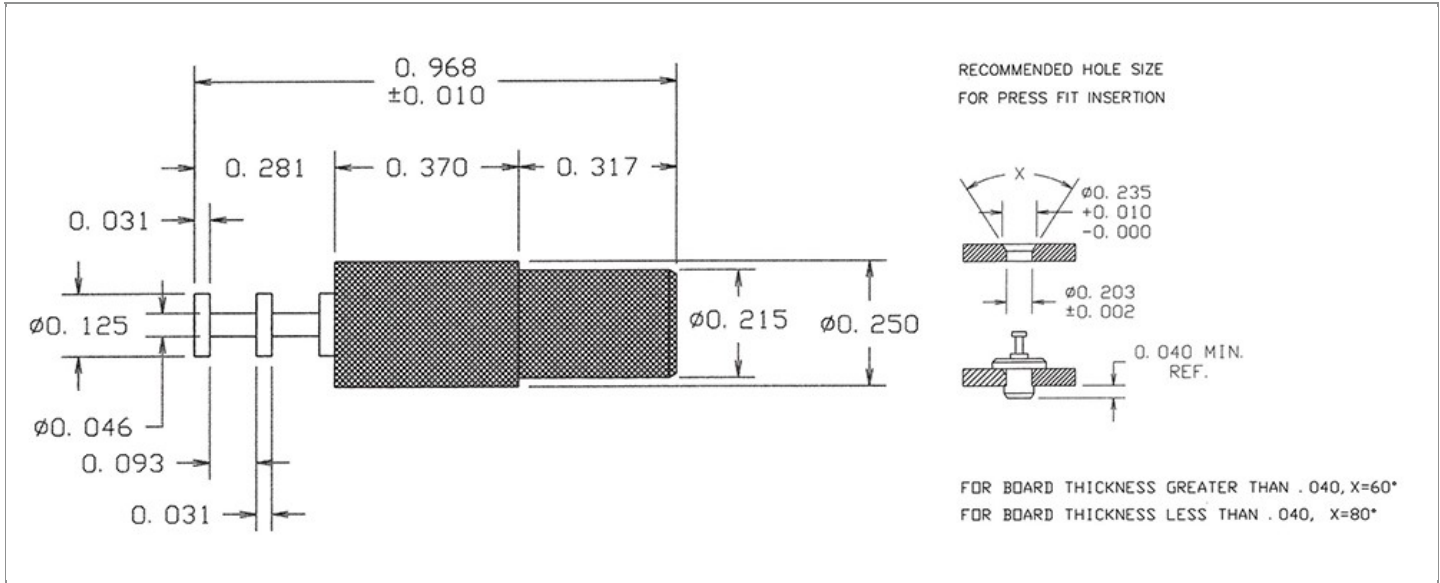

OVERALL LENGTH	PIN DIAMETER	FEED THRU COMBINATION	BOARD / PANEL MOUNTING METHOD
0.968"	N/A	N/A	PRESS FIT

SHANK LENGTH (L)	BOARD / PANEL THICKNESS	MOUNTING HOLE SIZE	DRILL SIZE
N/A	UP TO 1/4"	0.203" ± 0.002	13/64"

PART NO. STRUCTURE:

1102	-	85	-	XX	XX
PART SERIES		DIMENSION		FINISH	INSULATION COLOR

MATERIAL OPTIONS:

1102-85-XXXX

COMPONENT	MATERIAL	MATERIAL AND SPECIFICATION
TERMINAL	BRASS	BRASS PER ASTM B16, ALLOY C36000, 1/2 HARD
BASE/METAL SLEEVE	N/A	N/A
INSULATION*	PTFE	PTFE PER ASTM D1710
NUT	N/A	N/A
WASHER	N/A	N/A

*For Insulation color, please see INSULATION COLOR OPTIONS on Page 3

FINISH - PLATING OPTIONS:

1102-85-XXXX

FINISH CODE	COMPONENT	FINISH	FINISH AND SPECIFICATION
01	TERMINAL	SILVER	0.000300"MIN. SILVER PER ASTM B700, TYPE 2, GRADE D WITH A NON-CHROMATE PRESERVATIVE TREATMENT
	BASE/METAL SLEEVE	N/A	N/A
	NUT	N/A	N/A
	WASHER	N/A	N/A
03	TERMINAL	GOLD	0.00010"MIN. GOLD PER ASTM B488, TYPE II, CODE C OVER 0.000100"MIN. NICKEL PER SAE-AMS-QQ-N-290
	BASE/METAL SLEEVE	N/A	N/A
	NUT	N/A	N/A
	WASHER	N/A	N/A
04	TERMINAL	ELECTRO-TIN	0.000300"MIN. ELECTRO-TIN PER ASTM B545 OVER 0.000100"MIN. NICKEL PER SAE-AMS-QQ-N-290
	BASE/METAL SLEEVE	N/A	N/A
	NUT	N/A	N/A
	WASHER	N/A	N/A
044	TERMINAL	BRIGHT ELECTRO-TIN	0.000300"MIN. BRIGHT ELECTRO-TIN PER ASTM B545 OVER 0.000100"MIN. NICKEL PER SAE-AMS-QQ-N-290
	BASE/METAL SLEEVE	N/A	N/A
	NUT	N/A	N/A
	WASHER	N/A	N/A
05	TERMINAL	ELECTRO-SOLDER	0.000300"MIN. ELECTRO-SOLDER PER SAE-AMS-P-81728 OVER 0.000100"MIN. NICKEL PER SAE-AMS-QQ-N-290
	BASE/METAL SLEEVE	N/A	N/A
	NUT	N/A	N/A
	WASHER	N/A	N/A
088	TERMINAL	BRIGHT TIN-LEAD	0.000300"MIN. BRIGHT TIN-LEAD (Sn93%-Pb7%) PER ASTM B545 OVER 0.000100"MIN. NICKEL PER SAE-AMS-QQ-N-290
	BASE/METAL SLEEVE	N/A	N/A
	NUT	N/A	N/A
	WASHER	N/A	N/A

INSULATION COLOR OPTIONS:

1102-85-XX **XX**

INSULATION COLOR	BLACK	BLUE	BROWN	GRAY	GREEN	ORANGE	RED	VIOLET	WHITE	YELLOW
COLOR CODE NO.	10	16	11	18	15	13	12	17	19	14

TOLERANCES:*

DECIMAL	FRACTIONAL	ANGULAR	DRAWING ORIGATION DATE	LAST MODIFICATION DATE
± 0.005	± 1/64	± 5 °	10/18/2000	3/1/2017

*All dimensions are in inches.

RoHS COMPLIANCE:

1102-85-01XX

PART NUMBER	RoHS COMPLIANT
1102-85-0110	YES
1102-85-0111	NO
1102-85-0112	NO
1102-85-0113	NO
1102-85-0114	NO
1102-85-0115	YES
1102-85-0116	YES
1102-85-0117	YES
1102-85-0118	NO
1102-85-0119	YES

1102-85-03XX

PART NUMBER	RoHS COMPLIANT
1102-85-0310	YES
1102-85-0311	NO
1102-85-0312	NO
1102-85-0313	NO
1102-85-0314	NO
1102-85-0315	YES
1102-85-0316	YES
1102-85-0317	YES
1102-85-0318	NO
1102-85-0319	YES

1102-85-04XX

PART NUMBER	RoHS COMPLIANT
1102-85-0410	YES
1102-85-0411	NO
1102-85-0412	NO
1102-85-0413	NO
1102-85-0414	NO
1102-85-0415	YES
1102-85-0416	YES
1102-85-0417	YES
1102-85-0418	NO
1102-85-0419	YES

1102-85-044XX

PART NUMBER	RoHS COMPLIANT
1102-85-04410	YES
1102-85-04411	NO
1102-85-04412	NO
1102-85-04413	NO
1102-85-04414	NO
1102-85-04415	YES
1102-85-04416	YES
1102-85-04417	YES
1102-85-04418	NO
1102-85-04419	YES

1102-85-05XX

PART NUMBER	RoHS COMPLIANT
1102-85-0510	NO
1102-85-0511	NO
1102-85-0512	NO
1102-85-0513	NO
1102-85-0514	NO
1102-85-0515	NO
1102-85-0516	NO
1102-85-0517	NO
1102-85-0518	NO
1102-85-0519	NO

1102-85-088XX

PART NUMBER	RoHS COMPLIANT
1102-85-08810	NO
1102-85-08811	NO
1102-85-08812	NO
1102-85-08813	NO
1102-85-08814	NO
1102-85-08815	NO
1102-85-08816	NO
1102-85-08817	NO
1102-85-08818	NO
1102-85-08819	NO

TOOLING:

INSTALLATION TOOL: ARBOR PRESS	INSTALLATION TOOL: ANVIL (ARBOR PRESS OPERATED)	INSTALLATION TOOL: PRESS-FIT / ROLL SWAGE / RIVET PUNCH (ARBOR PRESS OPERATED)	INSTALLATION TOOL: PRESS-FIT (HAND OPERATED)
TM1	TA1102-85	TPI1102-85	TTI1102-85

NOTES:

DATASHEET NOTES

N/A

INSTRUCTION NOTES

SEE GENERAL PRESS FIT INSTALLATION INSTRUCTION ON CONCORD ELECTRONICS' WEBSITE WWW.CONCORD-ELECTRONICS.COM.