


<b>DRAWING NUMBER:</b>	<b>1154-41-XXXX</b>
<b>PRODUCT GROUP:</b>	TERMINALS
<b>SUB-GROUP:</b>	COMMERCIAL INSULATED TERMINALS
<b>DESCRIPTION:</b>	PTFE INSULATED FEED THRU (PIN/SLOTTED) TERMINAL

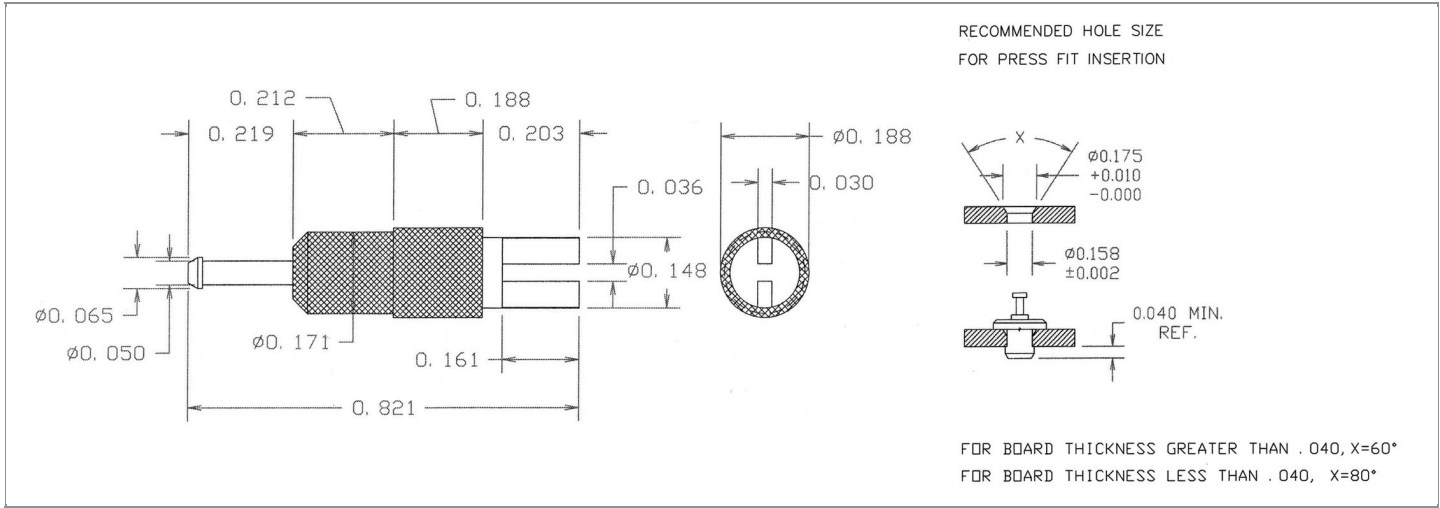

OVERALL LENGTH	PIN DIAMETER	FEED THRU COMBINATION	BOARD / PANEL MOUNTING METHOD
0.821"	0.050" ± 0.005	PIN/SLOTTED	PRESS FIT
SHANK LENGTH (L)	BOARD / PANEL THICKNESS	MOUNTING HOLE SIZE	DRILL SIZE
N/A	UP TO 3/16"	0.158" ± 0.002	#22

**PART NO. STRUCTURE:**

1154	-	41	-	XX	XX
PART SERIES		DIMENSION		FINISH	INSULATION COLOR

**MATERIAL OPTIONS:**

**1154-41-XXXX**

COMPONENT	MATERIAL	MATERIAL AND SPECIFICATION
TERMINAL	BRASS	BRASS PER ASTM B16, ALLOY C36000, 1/2 HARD
BASE/METAL SLEEVE	N/A	N/A
INSULATION*	PTFE	PTFE PER ASTM D1710
NUT	N/A	N/A
WASHER	N/A	N/A

\*For Insulation color, please see INSULATION COLOR OPTIONS on Page 3

## FINISH - PLATING OPTIONS:

1154-41-XXXX

FINISH CODE	COMPONENT	FINISH	FINISH AND SPECIFICATION
01	TERMINAL	SILVER	0.000300"MIN. SILVER PER ASTM B700, TYPE 2, GRADE D WITH A NON-CHROMATE PRESERVATIVE TREATMENT
	BASE/METAL SLEEVE	N/A	N/A
	NUT	N/A	N/A
	WASHER	N/A	N/A
03	TERMINAL	GOLD	0.00010"MIN. GOLD PER ASTM B488, TYPE II, CODE C OVER 0.000100"MIN. NICKEL PER SAE-AMS-QQ-N-290
	BASE/METAL SLEEVE	N/A	N/A
	NUT	N/A	N/A
	WASHER	N/A	N/A
04	TERMINAL	ELECTRO-TIN	0.000300"MIN. ELECTRO-TIN PER ASTM B545 OVER 0.000100"MIN. NICKEL PER SAE-AMS-QQ-N-290
	BASE/METAL SLEEVE	N/A	N/A
	NUT	N/A	N/A
	WASHER	N/A	N/A
044	TERMINAL	BRIGHT ELECTRO-TIN	0.000300"MIN. BRIGHT ELECTRO-TIN PER ASTM B545 OVER 0.000100"MIN. NICKEL PER SAE-AMS-QQ-N-290
	BASE/METAL SLEEVE	N/A	N/A
	NUT	N/A	N/A
	WASHER	N/A	N/A
05	TERMINAL	ELECTRO-SOLDER	0.000300"MIN. ELECTRO-SOLDER PER SAE-AMS-P-81728 OVER 0.000100"MIN. NICKEL PER SAE-AMS-QQ-N-290
	BASE/METAL SLEEVE	N/A	N/A
	NUT	N/A	N/A
	WASHER	N/A	N/A
088	TERMINAL	BRIGHT TIN-LEAD	0.000300"MIN. BRIGHT TIN-LEAD (Sn93%-Pb7%) PER ASTM B545 OVER 0.000100"MIN. NICKEL PER SAE-AMS-QQ-N-290
	BASE/METAL SLEEVE	N/A	N/A
	NUT	N/A	N/A
	WASHER	N/A	N/A

INSULATION COLOR OPTIONS:

1154-41-XX **XX**

INSULATION COLOR	BLACK	BLUE	BROWN	GRAY	GREEN	ORANGE	RED	VIOLET	WHITE	YELLOW
COLOR CODE NO.	10	16	11	18	15	13	12	17	19	14

TOLERANCES:\*

DECIMAL	FRACTIONAL	ANGULAR	DRAWING ORIGATION DATE	LAST MODIFICATION DATE
± 0.005	± 1/64	± 5 °	6/2/2004	3/1/2017

\*All dimensions are in inches.

RoHS COMPLIANCE:

1154-41-01XX

PART NUMBER	RoHS COMPLIANT
1154-41-0110	YES
1154-41-0111	NO
1154-41-0112	NO
1154-41-0113	NO
1154-41-0114	NO
1154-41-0115	YES
1154-41-0116	YES
1154-41-0117	YES
1154-41-0118	NO
1154-41-0119	YES

1154-41-03XX

PART NUMBER	RoHS COMPLIANT
1154-41-0310	YES
1154-41-0311	NO
1154-41-0312	NO
1154-41-0313	NO
1154-41-0314	NO
1154-41-0315	YES
1154-41-0316	YES
1154-41-0317	YES
1154-41-0318	NO
1154-41-0319	YES

1154-41-04XX

PART NUMBER	RoHS COMPLIANT
1154-41-0410	YES
1154-41-0411	NO
1154-41-0412	NO
1154-41-0413	NO
1154-41-0414	NO
1154-41-0415	YES
1154-41-0416	YES
1154-41-0417	YES
1154-41-0418	NO
1154-41-0419	YES

1154-41-044XX

PART NUMBER	RoHS COMPLIANT
1154-41-04410	YES
1154-41-04411	NO
1154-41-04412	NO
1154-41-04413	NO
1154-41-04414	NO
1154-41-04415	YES
1154-41-04416	YES
1154-41-04417	YES
1154-41-04418	NO
1154-41-04419	YES

1154-41-05XX

PART NUMBER	RoHS COMPLIANT
1154-41-0510	NO
1154-41-0511	NO
1154-41-0512	NO
1154-41-0513	NO
1154-41-0514	NO
1154-41-0515	NO
1154-41-0516	NO
1154-41-0517	NO
1154-41-0518	NO
1154-41-0519	NO

1154-41-088XX

PART NUMBER	RoHS COMPLIANT
1154-41-08810	NO
1154-41-08811	NO
1154-41-08812	NO
1154-41-08813	NO
1154-41-08814	NO
1154-41-08815	NO
1154-41-08816	NO
1154-41-08817	NO
1154-41-08818	NO
1154-41-08819	NO

**TOOLING:**

<b>INSTALLATION TOOL: ARBOR PRESS</b>	<b>INSTALLATION TOOL: ANVIL (ARBOR PRESS OPERATED)</b>	<b>INSTALLATION TOOL: PRESS-FIT / ROLL SWAGE / RIVET PUNCH (ARBOR PRESS OPERATED)</b>	<b>INSTALLATION TOOL: PRESS-FIT (HAND OPERATED)</b>
TM1	TA1154-41	TPI1154-41	TTI1154-41

**NOTES:**

<b>DATASHEET NOTES</b>
------------------------

N/A

<b>INSTRUCTION NOTES</b>
--------------------------

SEE GENERAL PRESS FIT INSTALLATION INSTRUCTION ON CONCORD ELECTRONICS' WEBSITE [WWW.CONCORD-ELECTRONICS.COM](http://WWW.CONCORD-ELECTRONICS.COM).