
DRAWING NUMBER:	1169-94-XXXX
PRODUCT GROUP:	TERMINALS
SUB-GROUP:	COMMERCIAL INSULATED TERMINALS
DESCRIPTION:	DIALLYL PHTHALATE INSULATED TERMINAL WITH THREADED TOP



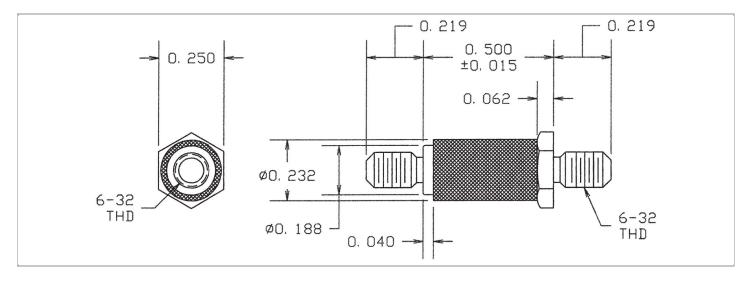

OVERALL LENGTH	PIN DIAMETER	FEED THRU COMBINATION	BOARD / PANEL MOUNTING METHOD		
0.938"	0.938" N/A N/A		THREAD MOUNT (6-32 NUT)		
SHANK LENGTH (L)	BOARD / PANEL THICKNESS	MOUNTING HOLE SIZE	DRILL SIZE		
N/A	UP TO 3/32"	0.144" ± 0.002	#27		

PART NO. STRUCTURE:

1169	-	94	-	XX	XX
PART SERIES		DIMENSION		FINISH	INSULATION COLOR

MATERIAL OPTIONS:

1169-94-XXXX

COMPONENT	MATERIAL	MATERIAL AND SPECIFICATION		
TERMINAL	BRASS	BRASS PER ASTM B16, ALLOY C36000, 1/2 HARD		
BASE/METAL SLEEVE	BRASS	BRASS PER ASTM B16, ALLOY C36000, 1/2 HARD		
INSULATION*	DIALLYL PHTHALATE	MOLDED DIALLYL PHTHALATE, TYPE SDG-F PER ASTM D5948		
NUT	N/A	N/A		
WASHER	N/A	N/A		

^{*}For Insulation color, please see INSULATION COLOR OPTIONS on Page 2

FINISH - PLATING OPTIONS:

1169-94-XXXX

FINISH CODE	COMPONENT	FINISH	FINISH AND SPECIFICATION		
	TERMINAL	ZINC	0.000100"MIN. ZINC WITH YELLOW TRIVALENT CHROMATE PER ASTM B633		
	BASE/METAL SLEEVE	ZINC	0.000100"MIN. ZINC WITH YELLOW TRIVALENT CHROMATE PER ASTM B633		
075	NUT	N/A	N/A		
	WASHER	N/A	N/A		

INSULATION COLOR OPTIONS:

1169-94-XX<mark>XX</mark>

INSULATION COLOR	BLACK	BLUE	BROWN	GRAY	GREEN	ORANGE	RED	VIOLET	WHITE	YELLOW
COLOR CODE NO.	10	16	11	18	15	13	12	17	19	14

TOLERANCES:*

DECIMAL	FRACTIONAL	ANGULAR	DRAWING ORIGINATION DATE	LAST MODIFICATION DATE
± 0.005	± 1/64	±5°	2/25/2002	3/1/2017

^{*}All dimensions are in inches.

RoHS COMPLIANCE:

1169-94-075XX

PART NUMBER	RoHS COMPLIANT
1169-94-07510	YES
1169-94-07511	YES
1169-94-07512	YES
1169-94-07513	YES
1169-94-07514	YES
1169-94-07515	YES
1169-94-07516	YES
1169-94-07517	YES
1169-94-07518	YES
1169-94-07519	YES

TOOLING:

INSTALLATION TOOL: ARBOR PRESS	INSTALLATION TOOL: ANVIL (ARBOR PRESS OPERATED)	INSTALLATION TOOL: PRESS-FIT / ROLL SWAGE / RIVET PUNCH (ARBOR PRESS OPERATED)	INSTALLATION TOOL: PRESS-FIT (HAND OPERATED)
N/A	N/A	N/A	N/A

DESCRIPTION: DIALLYL PHTHALATE INSULATED TERMINAL WITH THREADED TOP

DRAWING NUMBER: 1169-94-XXXX

NOTES:

DATASHEET NOTES

MATERIAL AND FINISH FOR THREADED HEX BASE AND TOP MOUNTS ARE THE SAME. NUT AND WASHER ARE NOT INCLUDED.

INSTRUCTION NOTES

N/A